
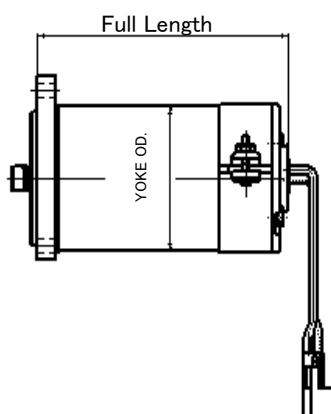


D.C.MOTOR

NIKKO

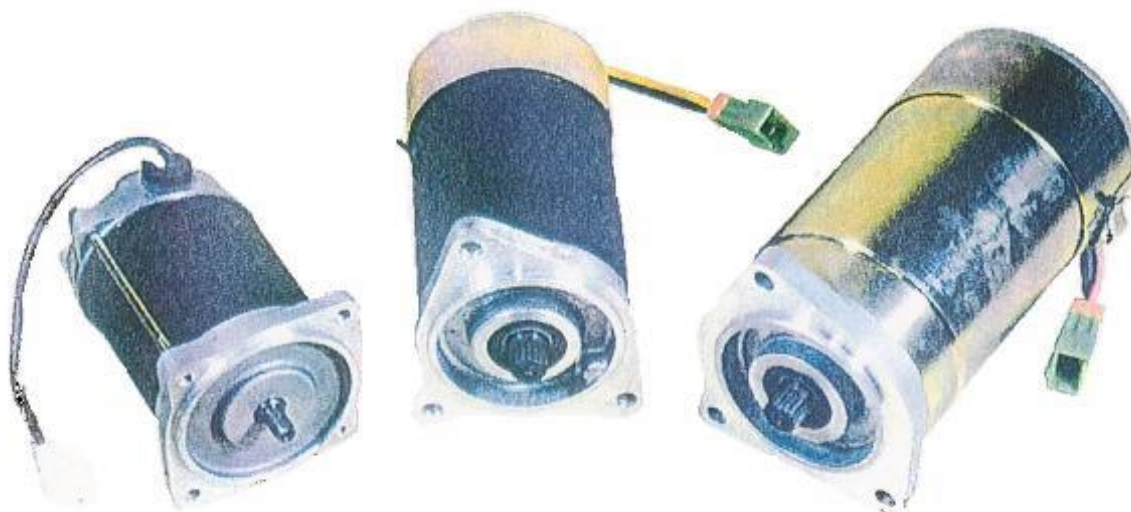

[Typical Specification list]

Field : Magnet type

Yoke Diameter	Nominal Voltage (V)	Rated Output (W)	Rotation (rpm)	Rated Time (min)	Outer Diameter		Weight (kg)	Protection type
					YOKE OD. (mm)	Full Length (mm)		
	24	0.45	2200	60	φ 125	263	14.0	All-Sealed
	48	0.9	3300	60	φ 125	250	10.0	All-Sealed
φ 83	24	150	2000	60	φ 83	161	3.0	All-Sealed
	48	300	2900	60	φ 83	161	3.0	All-Sealed
	48	300	4200	60	φ 83	161	3.0	All-Sealed
	24	300	4800	60	φ 83	172	3.2	All-Sealed
	36/48	350	2700	60	φ 83	172	3.2	All-Sealed
	36/48	400	5200	60	φ 83	172	3.2	All-Sealed
φ 96	48	400	4800	60	φ 96	177	4.0	All-Sealed
	48	450	3000	60	φ 96	177	4.0	All-Sealed
	48	500	4700	60	φ 96	177	4.0	All-Sealed
φ 96L	48	550	3300	60	φ 96	190	4.5	All-Sealed
	72	550	3300	60	φ 96	190	4.5	All-Sealed